



BAKERLUX SHOP.Pro™





BAKERLUX SHOP.Pro™

**The range of ovens studied for the gilding
of the frozen products inside commercial spaces,
where the rhythms are tight and the volumes are high.**

Design and intelligence, the elegance of glass and the technology of touch controls, as well as the built-in internet connection. Everything you could possibly imagine in an oven is now in your hands. Created to be perfect. In every detail.

 Watch the “Perfection is now” video on the official UNOX YouTube channel

An oven like nothing you have ever seen.



BAKERLUX SHOP.Pro™
**Modern design,
unique performance.**

BAKERLUX SHOP.Pro™ is the range of ovens designed for baking frozen baked foods in commercial spaces, where timing is crucial and volumes are vast.

Any mistake can cost you greatly, and every second counts.

BAKERLUX SHOP.Pro™ ovens are the result of UNOX's years of research and experience in supermarket bakery departments, convenience stores and fast food chains. They are designed for optimal performance in all working conditions and to be simple to use.

Using the latest smart technology, they provide the outlet with real support and can adapt to any working environment, be it behind the scenes in a prep room or in an open kitchen on the shop floor.

The 10, 6, 4 and 3-tray 600 x 400 models are the benchmark for any high-volume shop, whilst the 4 and 3-tray 460 x 330 models are perfectly suited to smaller shops with less available space.

The choice of four different control panel options means that there are more solutions available to you, so you can always find the BAKERLUX SHOP.Pro™ best suited to you.

 Watch the “Perfection is now” video on the official UNOX YouTube channel



Easy, simple, quick and durable.

BAKERLUX SHOP.Pro™ GO is a pure convection oven.

A tireless oven that was designed specifically for baking frozen croissants or for finishing prebaked frozen bread. Perfectly suited to the typical needs of cafés, snack bars, and smaller retail shops that don't need to bake delicate items.

BAKERLUX SHOP.Pro™ GO doesn't require water supply and is specifically equipped for the installation of the BAKERLUX SHOP.Pro™ waterless hood to reduce baking odours, allowing them to be installed anywhere in the shop.



BAKING PARAMETERS



3 BAKING
STEPS



0 - inf
TIMER



30 - 260°C
TEMPERATURE



0-20-40-60-80-100%
HUMIDITY



2 FAN
SPEEDS

UNOX INTELLIGENT PERFORMANCE



ADAPTIVE COOKING



AUTO SOFT



SMART PREHEATING



AUTO MATRIC



DATA DRIVEN COOKING

QUICK FUNCTIONS



99 PROGRAMS



PROVER CONTROL



OPTIONAL WI-FI & LAN



MULTI TIME



AUTOMATIC BAKING



LED

Add moisture to your baking, in an elegant and minimal way.

The BAKERLUX SHOP.Pro™ LED model is the first port of call for anyone who needs an easy-to-use convection oven that also gives you the option of adding humidity during the baking cycle as well as reducing fan speed to facilitate baking even the most delicate and critical items, such as large frozen loaves of bread, or frozen puff pastry products. The ability to control the BAKERLUX SHOP.Pro™ Prover from the control panel allows the oven to be stacked on top of it, creating a complete baking station. The hoods available for the BAKERLUX SHOP.Pro™ LED model are the water-supply-connected high-filtration steam-condensing BAKERLUX SHOP.Pro™ ventless hood or the BAKERLUX SHOP.Pro™ waterless hood, which requires no water supply.



BAKING PARAMETERS



3 BAKING STEPS



0 - inf TIMER



30 - 260°C TEMPERATURE



0-20-40-60-80-100% HUMIDITY



2 FAN SPEEDS

UNOX INTELLIGENT PERFORMANCE



ADAPTIVE COOKING



AUTO.SOFT



SMART.PREHEATING



AUTO.MATIC



DATA DRIVEN COOKING

QUICK FUNCTIONS



99 PROGRAMS



PROVER CONTROL



OPTIONAL WI-FI & LAN



MULTI.TIME



AUTOMATIC BAKING




TOUCH

That little extra touch that helps make the difference. And it shows.

The BAKERLUX SHOP.Pro™ TOUCH model offers all the advantages of a 2.4" LCD display that allows you to store and name baking programs with pictures, as well as offering quick and intuitive programming.

It is available with either a drop down door or in the Matic version, with a side opening door that opens automatically when the baking cycle is complete. The optional internet connection allows you to check actual use and remotely control every oven in every one of your shops directly from your PC or smartphone. The BAKERLUX SHOP.Pro™ TOUCH is specifically equipped for the installation of the BAKERLUX SHOP.Pro™ ventless or waterless hoods and for controlling the prover directly from the oven's control panel.

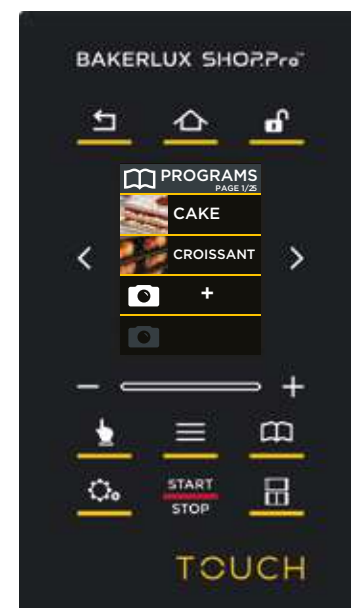

5" control panel with 2.4" LCD touchscreen display

BAKING PARAMETERS



9 BAKING STEPS



0 - inf
TIMER



30 - 260°C
TEMPERATURE



0-20-40-60-80-100%
HUMIDITY



2 FAN
SPEEDS

UNOX INTELLIGENT PERFORMANCE



ADAPTIVE COOKING



AUTO.SOFT



SMART.PREHEATING



AUTO.MATIC



DATA DRIVEN COOKING

QUICK FUNCTIONS



99 PROGRAMS



PROVER CONTROL



OPTIONAL WI-FI & LAN



MULTI.TIME




AUTOMATIC BAKING



MASTER

The ultimate technology for perfect results, every time.

The MASTER control panel is the highest level of technological evolution that excels in baking performance, automatic programs, artificial intelligence and internet connection. The BAKERLUX SHOP.Pro™ MASTER, with its 6" control panel, is equipped with CHEFUNOX automatic baking programs, MULTI.Time technology - allowing you to bake up to 10 different item types at the same time - and the READY. Bake function, allowing even users with no experience to get perfect results. AUTO.Matic intelligent automatic door opening as standard, DDC.Stats report with usage statistics directly viewable from the display, and an optional Internet connection allowing you to remotely control your ovens from your PC and smartphone. Ventless hood, waterless hood and prover all controllable from the display.

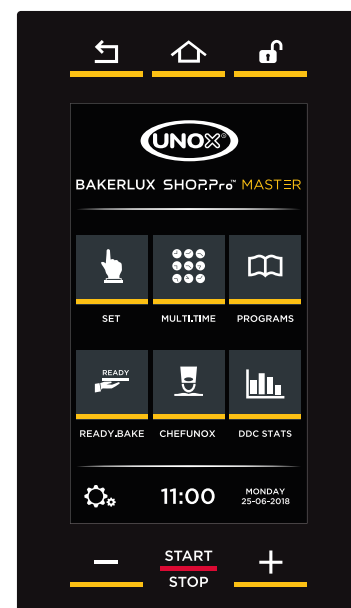

6" control panel with 5" LCD touchscreen display

BAKING PARAMETERS



9 BAKING STEPS



0 - inf TIMER



30 - 260°C TEMPERATURE



0-20-40-60-80-100% HUMIDITY



2 FAN SPEEDS

UNOX INTELLIGENT PERFORMANCE



ADAPTIVE COOKING



AUTO.SOFT



SMART.PREHEATING



AUTO.MATIC



DATA DRIVEN COOKING

QUICK FUNCTIONS



99 PROGRAMS



PROVER CONTROL



OPTIONAL WI-FI & LAN



MULTI.TIME



AUTOMATIC BAKING



UIP - Unox Intelligent Performance

Smart baking. Guaranteed results.

Achieving identical results for each load requires control, intelligence and expertise. Every detail counts: what happens before and during baking, the various load quantities, food whose properties vary with the seasons and the unique manual techniques of each member of your team.

For example?

Baking multiple trays requires more time than for just one or two: the door remains open for longer and the consequent drop in temperature is greater.

The oven must begin baking at a lower temperature and bake a higher quantity of food, for which more time is required to achieve the correct working conditions. In addition, the humidity emitted by the fully-loaded oven is greater than a partial load, and if the door is opened unexpectedly, it significantly alters all the parameters of the baking process.

Achieving repeatable results requires continual supervision, monitoring of every detail and immediate intervention. In a few words: control, intelligence and expertise. Exactly what your BAKERLUX SHOP.Pro™ MASTER oven, with UNOX INTELLIGENT Performance technology provides.

ADAPTIVE.Cooking™

Perfect results. Every time.

The ADAPTIVE.Cooking™ technology transforms your oven into an intelligent tool capable of interpreting your settings and understanding your desired result.

Using its sensors, the BAKERLUX SHOP.Pro™ MASTER registers changes in temperature, estimates the amount of food actually being cooked, and automatically adjusts the baking process by tweaking the time and temperature as needed, guaranteeing you perfect, identical results with every batch. Textbook results, no matter what the conditions.

AUTO.Soft

Gentle baking function.

A sharp increase in temperature in the presence of delicate products and in high oven load capacity conditions can compromise the uniformity of the overall result.

When AUTO.Soft is activated, BAKERLUX SHOP.Pro™ MASTER automatically regulates the rise in temperature according to what the sensors detect to make it gentler and guarantee an optimal distribution of heat inside each pan in the oven. Because every detail counts when your requirements take pride of place.

SMART.Preheating

Intelligent preheating.

Correctly preheating the oven creates the ideal conditions to optimise baking from the very first moments once the door is closed. The BAKERLUX SHOP.Pro™ MASTER oven, equipped with SMART.Preheating technology, automatically sets the best temperature and preheating time according to the parameters of the chosen baking process and to what has occurred in previous hours.

Should you need to quickly go from a high baking temperature to a lower one, it automatically engages the cooling system before signalling that it is ready. As always, to guarantee you maximum repeatability of results at all times of the day and energy savings up to 20% compared to manual preheating.

AUTO.Matic

Automatic door opening.

Commercial spaces can often be noisy and fast-paced, making constant supervision of the baking process difficult: it is entirely possible that, at times, nobody notices that the oven has finished baking, meaning that the food stays inside for a few minutes too long, ruining all the hard work and investment you put into ensuring that every batch comes out perfect.

BAKERLUX SHOP.Pro™ MASTER and TOUCH are always focused on giving you perfect results: thanks to their AUTO.Matic technology, they automatically open the door, interrupting the baking process at just the right moment to guarantee excellent results, even when you find yourself distracted.

WITHOUT ADAPTIVE. Cooking™

The quantity of food in the oven has an effect on the final result: a program set for a single tray will not be sufficient to cook a full load and, viceversa, a program set for a full load will overbake a single-tray load.

WITH ADAPTIVE. Cooking™

ADAPTIVE.Cooking™ technology recognises the quantity of food in the cooking chamber and automatically optimises the time, temperature and climatic conditions.

OPTIMAL SETTINGS FOR A HALF LOAD

TARTS

PRE 200°C

20 mins

165 °C

RESULT WITH A SINGLE TRAY

WITHOUT ADAPTIVE. Cooking™

Baking time:
20 mins
Actual average
temperature:
185°C

WITH ADAPTIVE. Cooking™

Baking time:
18 mins
Actual average
temperature:
165°C

RESULT WITH FULL LOAD

WITHOUT ADAPTIVE. Cooking™

Baking time:
20 mins
Actual average
temperature:
155°C

WITH ADAPTIVE. Cooking™

Baking time:
23 mins
Actual average
temperature:
165°C

WITHOUT AUTO.Matic

When the items have finished baking, timely manual intervention is necessary to immediately remove all the tray from the oven in order to avoid having the residual heat from the oven chamber continue to bakethe product, burning it. The humidity can also ruin its structure and fragrance.

WITH AUTO.Matic

Thanks to AUTO.Matic technology, the door opens automatically once the baking cycle has finished, allowing the residual heat to escape from the baking chamber, thus removing the risk of it ruining the product. Manual intervention is no longer necessary.

BREAD

25 mins

180 °C

20%

WITHOUT AUTO.Matic

Delay in
opening the
door after
baking cycle:
High risk.

WITH AUTO.Matic

Delay in
opening the
door after
baking cycle:
No risk.

WITHOUT AUTO.Soft

The change from one baking step to a next one at a much higher temperature will cause a rapid increase in temperature that can be aggressive toward delicate products: the result can be uneven and far from perfect.

WITH AUTO.Soft

The AUTO.Soft function manages the rise in temperature, making it more delicate in order to maintain uniformity throughout every part of every tray.

MINI PIZZAS STEP 1/2

5 mins

145 °C

20%

STEP 2/2

15 mins

180 °C

0%

WITHOUT AUTO.Soft

Temperature
increase time
145°C-180°C:
1 min

WITH AUTO.Soft

Temperature
increase time
145°C-180°C:
4 mins

WITHOUT SMART.Preheating

The oven preheats to the set temperature without taking into account how the oven has been used before that baking program, with the risk of not being hot enough for the first baking program of the day, or wasting energy during the preheating phase when the baking chamber has already accumulated sufficient heat during previous baking programs.

WITH SMART. Preheating

SMART.Preheating recognizes the activity that the oven has carried out before the baking program starts and intelligently adjusts the preheating accordingly: making it more intense with the first bake in the morning when the oven is cold, and reducing it or even skipping it should the oven chamber already be hot enough to start baking right away. This leads to always perfect baking results while saving time and energy.

CROISSANTS

PRE 190°C

18 mins

165 °C



WITHOUT SMART. Preheating

Preheating
time:
6 mins
Temp. of steel
in chamber after
preheating:
100°C

Preheating
time:
6 mins
Temp. of steel
in chamber after
preheating:
190°C

WITH SMART. Preheating

Preheating
time:
9 mins
Temp. of steel
in chamber after
preheating:
165°C

Preheating
time:
0 mins
Temp. of steel
in chamber after
preheating:
165°C

WITHOUT SMART. Preheating

Preheating
time:
6 mins
Temp. of steel
in chamber after
preheating:
100°C

Preheating
time:
6 mins
Temp. of steel
in chamber after
preheating:
190°C

WITH SMART. Preheating

Preheating
time:
9 mins
Temp. of steel
in chamber after
preheating:
165°C

Preheating
time:
0 mins
Temp. of steel
in chamber after
preheating:
165°C

DDC - Data Driven Cooking

Your oven is unique,
intelligent
and connected.

Data Driven Cooking artificial intelligence technology is designed to help you take advantage of the full potential of UNOX's BAKERLUX SHOP.Pro™ ovens: it collects data, processes information, analyses usage patterns and provides you with a daily report, and connects to the cloud to identify and offer you recipes and tips that are customised for your actual needs which translate directly into new dishes for your menu.

With Data Driven Cooking, UNOX's BAKERLUX SHOP.Pro™ ovens become much more than just baking equipment. They become real partners that contribute to building your success.

DDC technology is available for BAKERLUX SHOP.Pro™ MASTER and TOUCH ovens.

Data Driven Cooking.
Closer to you, closer to your success.



▶ Watch the "Data Driven Cooking" video

DDC.UNOX.com
Monitor data usage.

Thanks to the DDC.UNOX.com Internet portal you are linked to your UNOX MIND.Maps™ oven even when you are not in the kitchen. You can monitor its operating condition in real time, create recipes from your computer and send them to your ovens with a simple click.

You can also organize your company ovens into groups or areas, visualizing them in geospatial maps or hierarchical views.

DDC.App
Everything just a "Tap" away.


Install UNOX.DDC app on your smartphone and have remote control of your connected UNOX oven. You can monitor in real time its operating status, analyze consumptions reports, create recipes on your smartphone, receive the ones recommend by DDC.Coach and send them to your ovens with a click.

DDC.App allows you to control your oven at any time, anywhere. The advantage of having your oven within reach of a Tap!

DDC.Stats
Monitored for constant improvement.

The BAKERLUX SHOP.Pro™ MASTER ovens monitor and analyse water and energy consumption levels, record baking times, and measure how long the door stays open.

The DDC.Stats function on the control panel translates this data into clear, valuable, useful information that helps you to identify any room for improvement and completely eliminate waste, thereby increasing your daily profit.

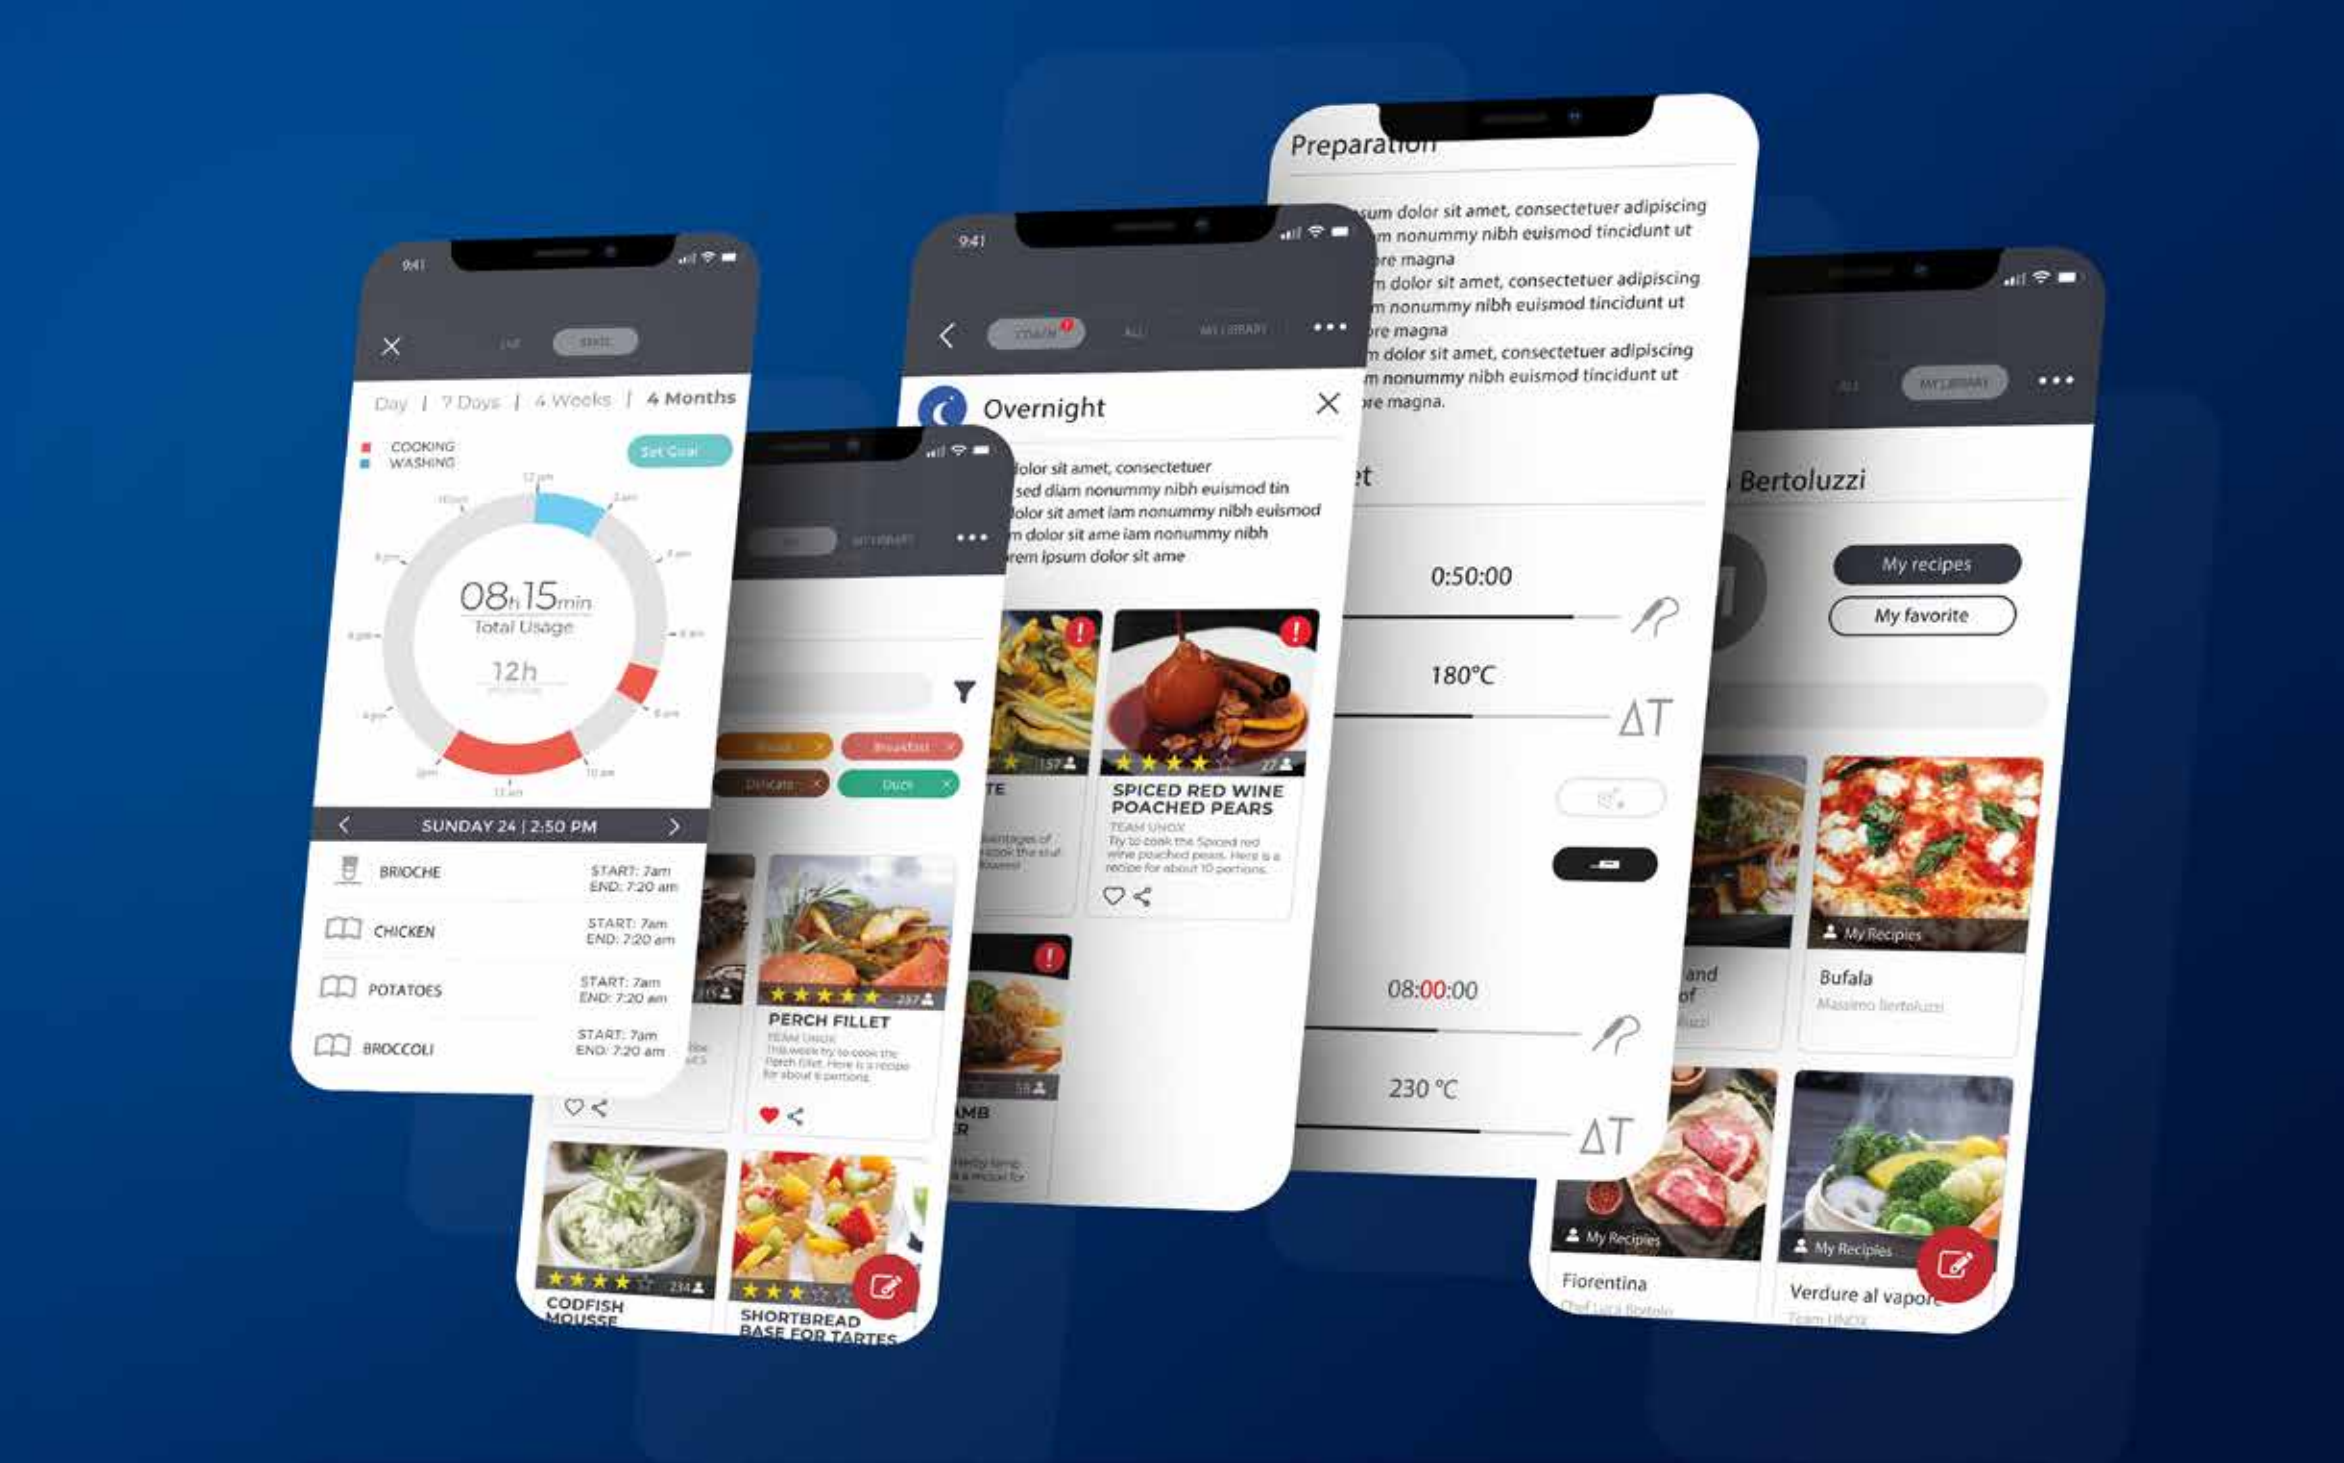



UIC - Unox Intensive Cooking

You've chosen not to settle for less. Maximum baking efficiency.

Bake to perfection, sell, repeat. All day, every day. For the tight schedule of a commercial space whose core business is selling baked goods, the priorities are high quality standards, repeatable results, speed of execution, energy savings and reliability. This was what we aimed for and this what we have made possible. UNOX INTENSIVE.Cooking means maximum baking efficiency to maximise production and variety of range. With the assurance of an ENERGY STAR certified product. Certify your success.

DRY.Plus

Extracting humidity for maximum flavour.

When baking leavened goods, the presence of humidity during the final stages of baking can compromise the achievement of your desired result.

DRY.Plus technology expels humid air from the baking chamber, be it moisture released from the products being baked or any that was generated by the STEAM.Plus system during a previous use.

By doing so, DRY.Plus technology helps the internal structure of the product to form properly, guaranteeing a texture that remains the same even hours after it has finished baking. Get used to doing great things.

STEAM.Plus

On-demand humidity for perfect baking.

When baking frozen baked goods, effectively using humidity helps to develop both the internal structure and the golden crust on the outside of the product.

STEAM.Plus technology allows you to instantly create humidity inside the baking chamber, from a temperature of 90°C up to 260°C, for excellent results with every batch.

AIR.Plus

Transmit, unite, transform.

AIR.Plus technology guarantees perfect air and heat distribution within the baking chamber, for uniform results at every point throughout every tray, for all trays being baked. Thanks to AIR.Plus, once baked, your foods will be evenly coloured on the outside and their integrity and texture will remain intact for many hours afterwards.

With the BAKERLUX SHOP.Pro™ MASTER, TOUCH and LED, you can choose two different fan speeds, allowing you to bake both lighter and heavier products: no need to limit the variety of your range.

EFFICIENT.Power

Power and efficiency.

The BAKERLUX SHOP.Pro™ represents a guarantee of maximum performance and efficiency.

Maximum speed in reaching temperature and precision in maintaining it, energy savings guaranteed by a low-e glass lining, and high-performance insulation materials.

In figures? 300 seconds to go from 60°C to 260°C. Best-in-class convection efficiency, ENERGY STAR certified.

The details make all the difference. And you know it.



DOUBLE GLASS



EASY TO CLEAN INTERNAL GLASS



MULTIFAN SYSTEM



ERGONOMIC HANDLE



SOFT-CLOSE DOOR



100% STAINLESS STEEL STRUCTURE



USB PORT - UPLOAD/DOWNLOAD DATA



WI-FI/LAN CONNECTION READY



LED LIGHTING



IPX4 PROTECTION CLASS



HIGH-PERFORMANCE INSULATION MATERIALS



TOUCH SCREEN PANEL FOR MASTER AND TOUCH

BAKERLUX SHOP.Pro™

Drop down or side opening doors.
For any space and any use.



DROP DOWN DOOR OPENING (for Rossella, Elena, Arianna and Stefania models, TOUCH, LED and GO versions)




RIGHT-TO-LEFT DOOR OPENING (for Camilla and Vittoria ovens and for all other MASTER.Matic and TOUCH.Matic models)

Certified Ventless Hood

The UNOX steam condensing hood is an ideal solution for installing your BAKERLUX SHOP.Pro™ MASTER, TOUCH or LED oven anywhere in your shop, even far away from or without* a ceiling-mounted ventilation hood. Inside is a filter which removes both the smells and the latent and perceptible heat from the fumes expelled by the vent, with no need to maintain or clean the filter. UNOX hoods maintain the style and design of the oven itself, blending the combination into one strong, quiet and effective system.

*subject to verification and approval by authorities and local regulations




Waterless Hood

Ventless hoods must be connected to a source of water, but water pipes are not always available in all shops or departments. The UNOX waterless hood for BAKERLUX SHOP.Pro™ is designed to satisfy this need, and is capable of condensing steam from bakery operations without the use of water. The waterless hood can be installed on all versions of the BAKERLUX SHOP.Pro™ and requires no water to function.



Built-in installation

The modern furnishings of the best shops around the world are born with the aim of offering the best possible experience even in the presence of very small spaces. The all new UNOX built-in hood, equipped with a activated carbon filter, allows you to correctly use your oven even when installed inside a piece of furniture or on the service counter, taking full advantage of the few available spaces. With BAKERLUX SHOP.Pro™ and built-in hood, you improve your customers' experience, expand your offer and increase the profitability per square meter of your room.

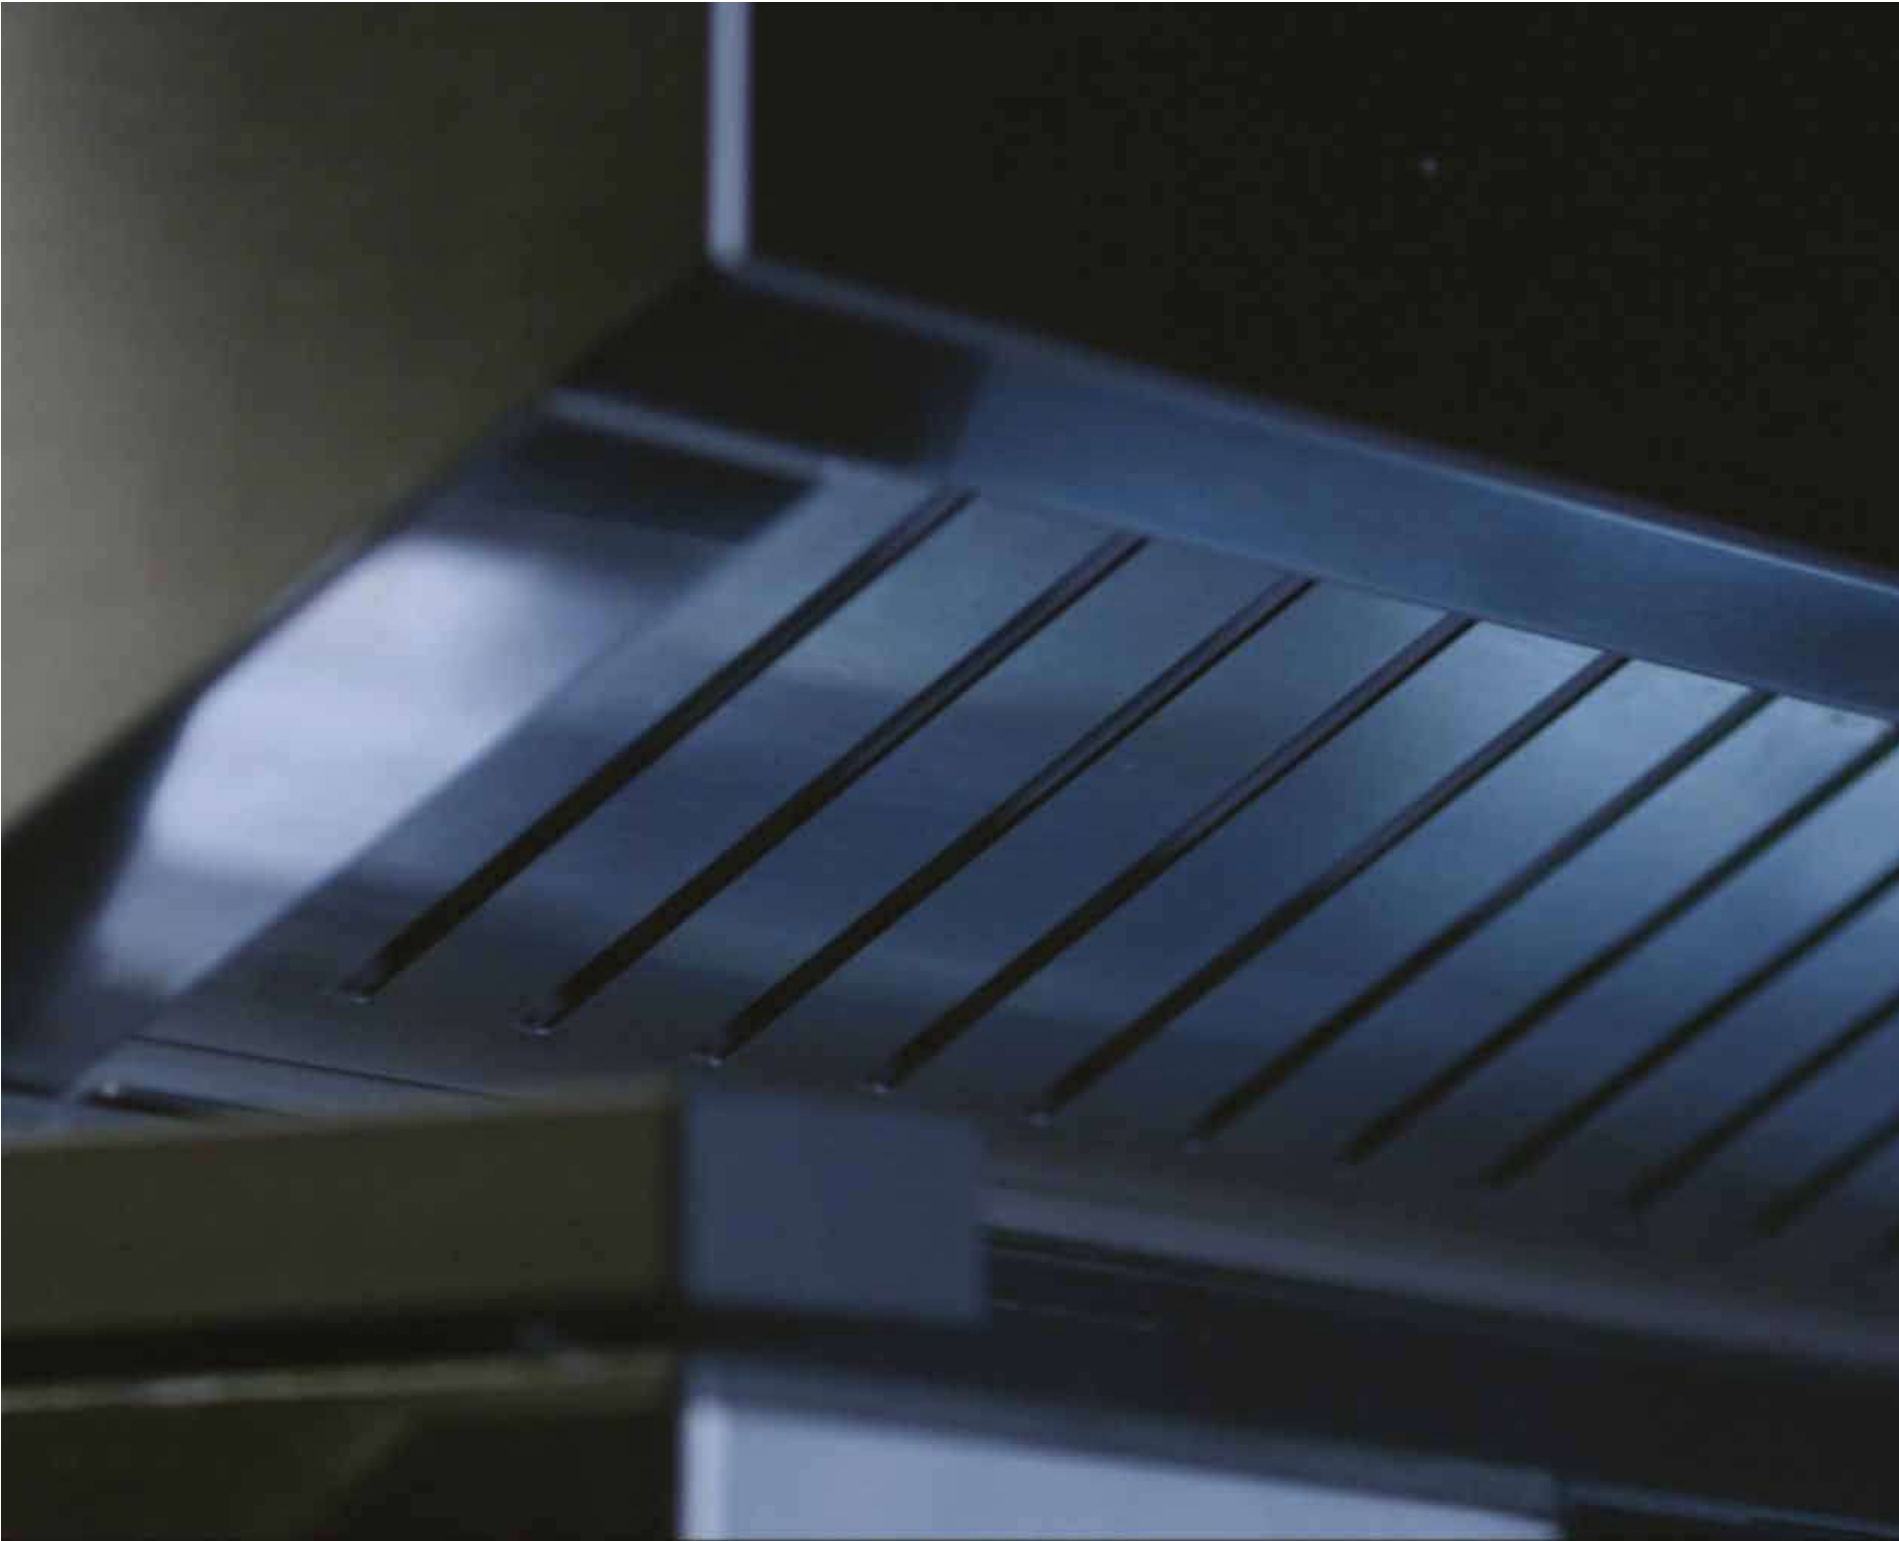


Production without interruptions.

It takes care of your products.

The provers for the BAKERLUX SHOP.Pro™, available for the MASTER, TOUCH and LED versions, accurately control the temperature and humidity throughout every moment of the proving process, producing consistent results that are always faithful to tradition.

The BAKERLUX SHOP.Pro™ provers allow you to set your desired humidity percentage inside the proving chamber in order to obtain perfect results every time, for every recipe.

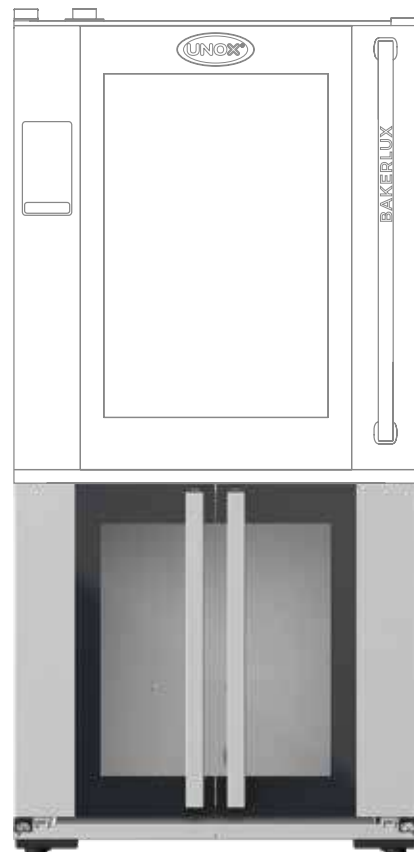

Collection of trays

Baking essentials.

The Baking Essentials collection of trays are the best tool you can have to take full advantage of the baking technology of your BAKERLUX SHOP.Pro™. Each tray has specific characteristics that are conceived, designed and created for specific purposes.

The perfect tray for excellent results.

PAN.FRY

Enamel coated pan for frying breaded products.



IDEAL FOR:

- Croquettes
- Breaded fish filets
- Breaded cutlets
- Breaded vegetables

ADVANTAGES

- Reduces the amount of cooking grease and oil
- Uniform cooking on every point of the tray

FORO.BAKE

Perforated aluminium pan.



IDEAL FOR:


- Pastry
- Cakes
- Baking on silicon mats

ADVANTAGES

- Perforated surface to allow better transpiration of moisture
- Ultra low edge for maximum baking uniformity

FAKIRO™

12mm thick aluminium plate, flat on one side and ribbed on the other for dual use.

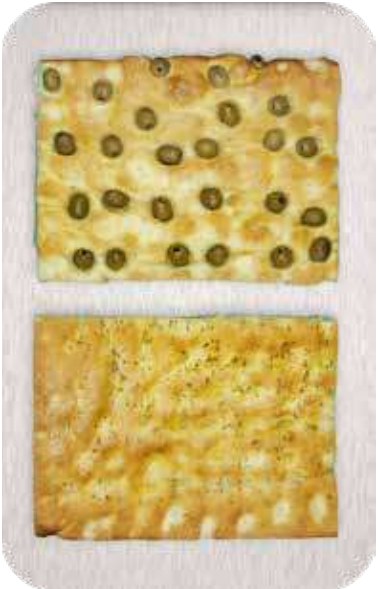

IDEAL FOR:


- Pizza
- Focaccia
- Bread
- Sandwiches

ADVANTAGES

- Focaccias and sandwiches heated in just 3 minutes
- 13mm thick for stone baked effect

FORO.BLACK

Non-stick perforated aluminium pan.

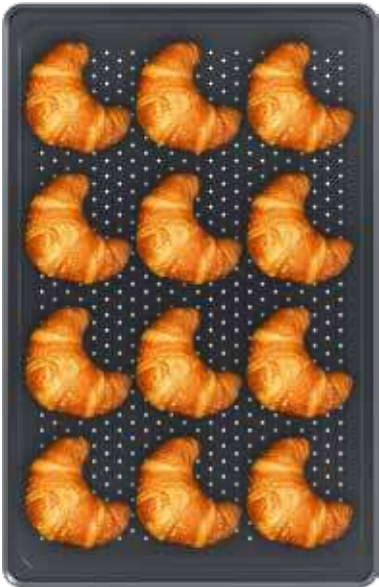

IDEAL FOR:

- Croissants
- Fresh bread
- Danish pastries
- Pastry

ADVANTAGES

- Baking parchment is not required
- Ultra low edge for maximum baking uniformity

BAKING

FAKIRO.GRILL

12mm non-stick aluminium plate, flat on one side and ribbed on the other for dual use.



IDEAL FOR:

- Pizza
- Focaccia
- Bread
- Sandwiches

ADVANTAGES

- Pizza with a crisp base ready in just 4 min
- 12mm thick for stone baked effect

FORO.SILICO

15 mm thick silicone coated perforated aluminium pan for pastry and bakery products.



IDEAL FOR:


- Croissants
- Fresh bread
- Danish pastries
- Pastry

ADVANTAGES

- Designed for pastry products rich in sugar
- High temperature resistant silico and anti-scratch

BAGUETTE.GRID

Ultralight chromium plated tray to bake 5 large baguettes.

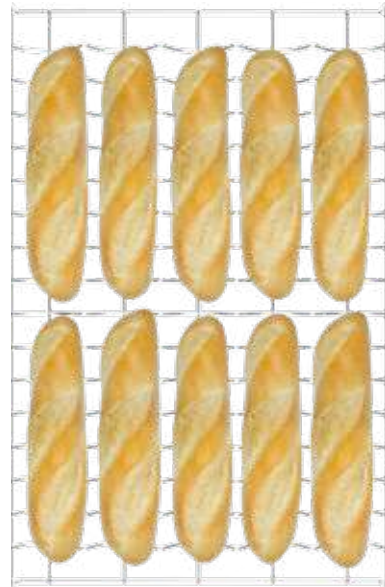

IDEAL FOR:

- Frozen baguettes
- Frozen sandwich baguettes

ADVANTAGES

- Bake up to 10 mini-baguettes in 18 min
- Maximum heat distribution for quick baking

FORO.BAGUETTEBLACK

Non-stick aluminium perforated tray with 5 channels to bake baguettes.



IDEAL FOR:

- Fresh baguettes
- Fresh sandwich baguettes

ADVANTAGES

- 5 perfectly separate and uniform baguettes
- Quick and easy cleaning operations

BAKE.BLACK

Non-stick aluminium pan.



IDEAL FOR:

- Croissants
- Danish pastries
- Pastry

ADVANTAGES

- Baking parchment is not required
- Ultra low edge for maximum baking uniformity

BAKE

Aluminium tray.



IDEAL FOR:

- Pastry
- Cakes
- Baking on silicon mats

ADVANTAGES

- Thin tray for rapid heat exchange
- Ultra low edge for maximum baking uniformity

FORO.BAKE



Available in size

600 x 400	Art.: TG 410
460 x 330	Art.: TG 310

FORO.BLACK



Available in size

600 x 400	Art.: TG 430
460 x 330	Art.: TG 330


STEEL.BAKE



Available in size

600 x 400	Art.: TG 450
-----------	---------------------

FAKIRO™

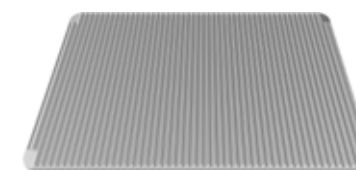

Available in size

600 x 400	Art.: TG 440
460 x 330	Art.: TG 335

FAKIRO.GRILL



Available in size

600 x 400	Art.: TG 465
-----------	---------------------


BAKE



Available in size

600 x 400	Art.: TG 405
460 x 330	Art.: TG 305


CHROMO.GRID

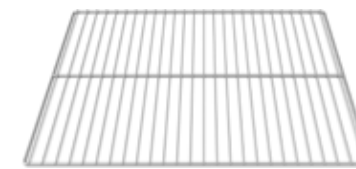

Available in size

600 x 400	Art.: GRP 405
460 x 330	Art.: GRP 305

BAGUETTE.GRID

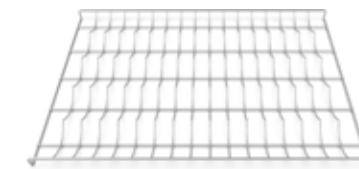

Available in size

600 x 400	Art.: GRP 410
460 x 330	Art.: GRP 310


BAKE.BLACK



Available in size

600 x 400	Art.: TG 460
-----------	---------------------

FORO.BAGUETTE

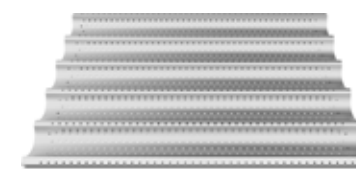

Available in size

600 x 400	Art.: TG 435
-----------	---------------------

FORO.BAGUETTE.BLACK



Available in size

600 x 400	Art.: TG 445
-----------	---------------------

FORO.SILICO



Available in size

600 x 400	Art.: TG 415
460 x 330	Art.: TG 315



UNOX.Care Program

Protect the performance you deserve.

The UNOX.Pure filter reduces the quantity of substances in the water which contribute to the formation of lime scale and/or rust inside the baking chamber, a known cause of malfunctioning and breakdown. The UNOX filters are easy to install in any BAKERLUX SHOP.Pro™ oven or stack. For the larger ovens, Camilla and Vittoria, Unox recommends UNOX.Pure, whilst for smaller ovens, Bakery.Pure is sufficient to guarantee - in most applications - a year of worry-free work.

The MASTER and TOUCH control panels monitor the quantity of water filtered by the Bakery.Pure and UNOX.Pure systems and automatically notify you when the time has come to replace the filter, optimising its use.



UNOX.Pure
Art.: XHC003



Bakery.Pure
Art.: XHC010



DET&Rinse SPRAY
Art.: DB1044

A truly excellent line.



MASTER



TOUCH



TOUCH



LED



GO



DROP DOWN DOOR OPENING

4 600 x 400 3 600 x 400 4 460 x 330 3 460 x 330



ROSSELLA



ELENA



ARIANNA



STEFANIA

Type of opening				
Type of closing				
Distance between trays				
Frequency				
Voltage				
Electrical capacity				
Dimensions WxDxH (mm)				
Weight				
	XEFT-04EU-ETDV	XEFT-03EU-ETDV	XEFT-04HS-ETDV	XEFT-03HS-ETDV
Type of opening	Drop down door	Drop down door	Drop down door	Drop down door
Type of closing	Manual	Manual	Manual	Manual
Distance between trays	75 mm	75 mm	75 mm	75 mm
Frequency	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Voltage	400 V - 3N	230 V- 1N	230 V- 1N	230 V- 1N
Electrical capacity	6.9 kW	3.5 kW	3.5 kW	3 kW
Dimensions WxDxH (mm)	800x811x500	800x811x425	600x669x500	600x669x425
Weight	57 kg	46 kg	39 kg	36 kg
	XEFT-04EU-ELDV	XEFT-03EU-ELDV	XEFT-04HS-ELDV	XEFT-03HS-ELDV
Type of opening	Drop down door	Drop down door	Drop down door	Drop down door
Type of closing	Manual	Manual	Manual	Manual
Distance between trays	75 mm	75 mm	75 mm	75 mm
Frequency	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Voltage	400 V - 3N	230 V- 1N	230 V- 1N	230 V- 1N
Electrical capacity	6.9 kW	3.5 kW	3.45 kW	3 kW
Dimensions WxDxH (mm)	800x811x500	800x811x425	600x669x500	600x669x425
Weight	57 kg	46 kg	39 kg	36 kg
	XEFT-04EU-EGDN	XEFT-03EU-EGDN	XEFT-04HS-EGDN	XEFT-03HS-EGDN
Type of opening	Drop down door	Drop down door	Drop down door	Drop down door
Type of closing	Manual	Manual	Manual	Manual
Distance between trays	75 mm	75 mm	75 mm	75 mm
Frequency	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Voltage	400 V - 3N	230 V- 1N	230 V- 1N	230 V- 1N
Electrical capacity	6.9 kW	3.5 kW	3.5 kW	3 kW
Dimensions WxDxH (mm)	800x811x500	800x811x425	600x669x500	600x669x425
Weight	57 kg	46 kg	39 kg	36 kg

MATIC RIGHT-TO-LEFT AUTOMATIC DOOR OPENING

10 600 x 400 6 600 x 400 4 600 x 400 3 600 x 400 4 460 x 330 3 460 x 330



CAMILLA.MATIC



VITTORIA.MATIC



ROSSELLA.MATIC



ELENA.MATIC



ARIANNA.MATIC












STEFANIA.MATIC

XEFT-10EU-EMRV	XEFT-06EU-EMRV	XEFT-04EU-EMRV	XEFT-03EU-EMRV	XEFT-04HS-EMRV	XEFT-03HS-EMRV
Right-to-left	Right-to-left	Right-to-left	Right-to-left	Right-to-left	Right-to-left
Electric closing	Electric closing	Electric closing	Electric closing	Electric closing	Electric closing
75 mm	75 mm	75 mm	75 mm	75 mm	75 mm
50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
400 V - 3N	400 V - 3N	400 V - 3N	230 V- 1N	230 V- 1N	230 V- 1N
15.5 kW	10.3 kW	6.9 kW	3.5 kW	3.5 kW	3 kW
800x811x952	800x811x682	800x811x502	800x811x427	600x669x502	600x669x427
96 kg	72 kg	57 kg	46 kg	39 kg	36 kg
XEFT-10EU-ETRV	XEFT-06EU-ETRV	XEFT-04EU-ETRV	XEFT-03EU-ETRV	XEFT-04HS-ETRV	XEFT-03HS-ETRV
Right-to-left	Right-to-left	Right-to-left	Right-to-left	Right-to-left	Right-to-left
Electric closing	Electric closing	Electric closing	Electric closing	Electric closing	Electric closing
75 mm	75 mm	75 mm	75 mm	75 mm	75 mm
50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
400 V - 3N	400 V - 3N	400 V - 3N	230 V- 1N	230 V- 1N	230 V- 1N
15.5 kW	10.3 kW	6.9 kW	3.5 kW	3.5 kW	3 kW
800x811x952	800x811x682	800x811x502	800x811x427	600x669x502	600x669x427
96 kg	72 kg	57 kg	46 kg	39 kg	36 kg
XEFT-10EU-ETRV-MT	XEFT-06EU-ETRV-MT				
Right-to-left	Right-to-left				
Manual	Manual				
75 mm	75 mm				
50/60 Hz	50/60 Hz				
400 V - 3N	400 V - 3N				
15.5 kW	10.3 kW				
800x811x952	800x811x682				
96 kg	72 kg				
XEFT-10EU-ETLV	XEFT-06EU-ELRV				
Right-to-left	Right-to-left				
Manual	Manual				
75 mm	75 mm				
50/60 Hz	50/60 Hz				
400 V - 3N	400 V - 3N				
15.5 kW	10.3 kW				
800x811x952	800x811x682				
96 kg	72 kg				
XEFT-10EU-EGRN	XEFT-06EU-EGRN				
Right-to-left	Right-to-left				
Manual	Manual				
75 mm	75 mm				
50/60 Hz	50/60 Hz				
400 V - 3N	400 V - 3N				
15.5 kW	10.3 kW				
800x811x952	800x811x682				
96 kg	72 kg				

Note: Door opening from left to right - example of code XEFT-10EU-EMLV (L= left) (R= right)

Ask for more.

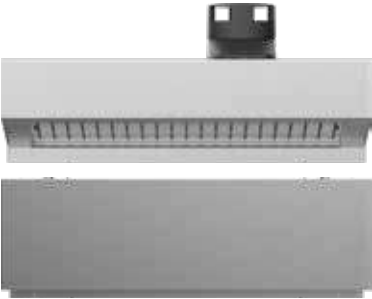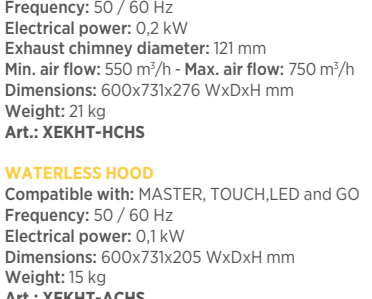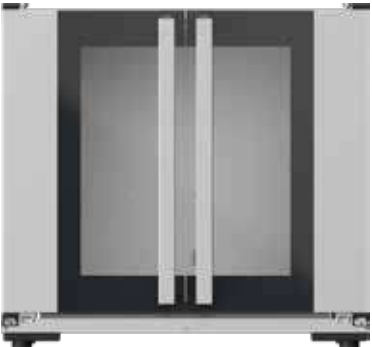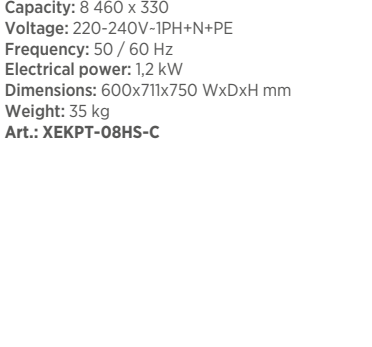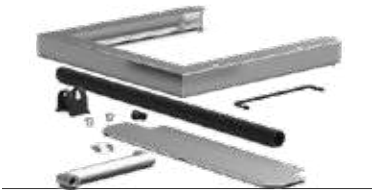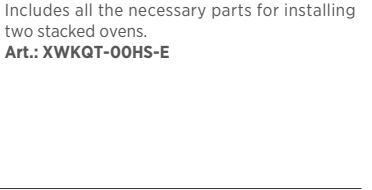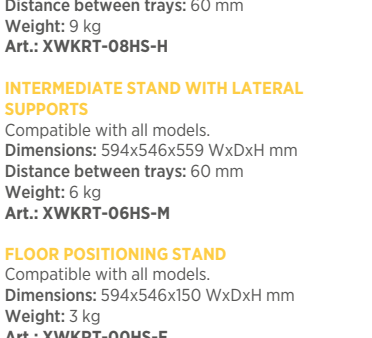	600 x 400	460 x 330
HOODS	 HOOD WITH STEAM CONDENSER Compatible with: MASTER, TOUCH and LED Frequency: 50 / 60 Hz Electrical power: 0,2 kW Exhaust chimney diameter: 121 mm Min. air flow: 550 m³/h - Max. air flow: 750 m³/h Dimensions: 800x863x276 WxDxH mm Weight: 23 kg Art.: XEKHT-HCEU WATERLESS HOOD Compatible with: MASTER, TOUCH,LED and GO Frequency: 50 / 60 Hz Electrical power: 0,1 kW Dimensions: 800x863x205 WxDxH mm Weight: 25 kg Art.: XEKHT-ACEU	 HOOD WITH STEAM CONDENSER Compatible with: MASTER, TOUCH and LED Frequency: 50 / 60 Hz Electrical power: 0,2 kW Exhaust chimney diameter: 121 mm Min. air flow: 550 m³/h - Max. air flow: 750 m³/h Dimensions: 600x731x276 WxDxH mm Weight: 21 kg Art.: XEKHT-HCHS WATERLESS HOOD Compatible with: MASTER, TOUCH,LED and GO Frequency: 50 / 60 Hz Electrical power: 0,1 kW Dimensions: 600x731x205 WxDxH mm Weight: 15 kg Art.: XEKHT-ACHS BUILT-IN INSTALLATION KIT Only compatible with ARIANNA models Dimensions: 600x697x100 WxDxH mm Weight: 8,5 Kg
PROVERS	 PROVER Compatible with: MASTER, TOUCH and LED Capacity: 8 600 x 400 Voltage: 220-240V-1PH+N+PE Frequency: 50 / 60 Hz Electrical power: 1,2 kW Dimensions: 800x792x750 WxDxH mm Weight: 37 kg Art.: XEKPT-08EU-C PROVER Compatible with: MASTER, TOUCH and LED Capacity: 10 600 x 400 Voltage: 220-240V-1PH+N+PE Frequency: 50 / 60 Hz Electrical power: 1,2 kW Dimensions: 800x792x886 WxDxH mm Weight: 42 kg Art.: XEKPT-10EU-C	 PROVER Compatible with: MASTER, TOUCH and LED Capacity: 8 460 x 330 Voltage: 220-240V-1PH+N+PE Frequency: 50 / 60 Hz Electrical power: 1,2 kW Dimensions: 600x711x750 WxDxH mm Weight: 35 kg Art.: XEKPT-08HS-C
STACKING KIT	 STACKING KIT Compatible with all models. Includes all the necessary parts for installing two stacked ovens. Art.: XWKQT-00EF-E STACKING KIT Includes all the necessary parts for installing any oven stacked on a ROSSELLA in any version. Art.: XWKQT-04EF-E	 STACKING KIT Compatible with all models. Includes all the necessary parts for installing two stacked ovens. Art.: XWKQT-00HS-E
STANDS	 HIGH STAND WITH LATERAL SUPPORTS Compatible with all models. Dimensions: 794x688x738 WxDxH mm Distance between trays: 60 mm Weight: 10 kg Art.: XEKRT-08EU-H INTERMEDIATE STAND WITH LATERAL SUPPORTS Compatible with all models. Dimensions: 794x688x559 WxDxH mm Distance between trays: 60 mm Weight: 7 kg Art.: XEKRT-06EU-M FLOOR POSITIONING STAND Compatible with all models. Dimensions: 794x688x150 WxDxH mm Weight: 4 kg Art.: XWKRT-00EF-F	 HIGH STAND WITH LATERAL SUPPORTS Compatible with all models. Dimensions: 594x546x783 WxDxH mm Distance between trays: 60 mm Weight: 9 kg Art.: XWKRT-08HS-H INTERMEDIATE STAND WITH LATERAL SUPPORTS Compatible with all models. Dimensions: 594x546x559 WxDxH mm Distance between trays: 60 mm Weight: 6 kg Art.: XWKRT-06HS-M FLOOR POSITIONING STAND Compatible with all models. Dimensions: 594x546x150 WxDxH mm Weight: 3 kg Art.: XWKRT-00HS-F

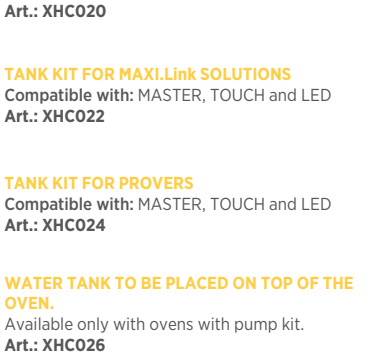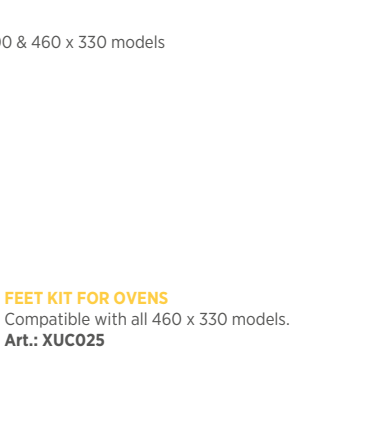	600 x 400	460 x 330
TANK KIT	 TANK KIT FOR SINGLE OVEN WITH PUMP Compatible with: MASTER, TOUCH and LED Art.: XHC021 TANK KIT FOR MAXI.Link SOLUTIONS Compatible with: MASTER, TOUCH and LED Art.: XHC023 TANK KIT FOR PROVERS Compatible with: MASTER, TOUCH and LED Art.: XHC024 WATER TANK TO BE PLACED ON TOP OF THE OVEN. Available only with ovens with pump kit. Art.: XHC026	 TANK KIT FOR SINGLE OVEN WITH PUMP Compatible with: MASTER, TOUCH and LED Art.: XHC020 TANK KIT FOR MAXI.Link SOLUTIONS Compatible with: MASTER, TOUCH and LED Art.: XHC022 TANK KIT FOR PROVERS Compatible with: MASTER, TOUCH and LED Art.: XHC024 WATER TANK TO BE PLACED ON TOP OF THE OVEN. Available only with ovens with pump kit. Art.: XHC026
OTHER ACCESSORIES	 PUMP KIT Compatible with: MASTER, TOUCH and LED - 600 x 400 & 460 x 330 models Art.: XHC016 BUZZER KIT Compatible with all 600 x 400 & 460 x 330 models. Art.: XEC015 WHEELS KIT Compatible with all 600 x 400 & 460 x 330 models. Art.: XUC012 FEET KIT FOR OVENS Compatible with all 600 x 400 models. Art.: XUC035 FEET KIT FOR PROVER Compatible with all 600 x 400 & 460 x 330 models. Art.: XUC045	 FEET KIT FOR OVENS Compatible with all 460 x 330 models. Art.: XUC025
UNOX.CARE		UNOX.PURE - FILTRATION SYSTEM Compatible with: CAMILLA e VITTORIA - MASTER, TOUCH and LED. Art.: XHC003 UNOX.PURE - REPLACEMENT FILTER CARTRIDGE Compatible with: CAMILLA e VITTORIA - MASTER, TOUCH and LED. Replacement filter cartridge Art.: XHC004 BAKERY.PURE - FILTRATION SYSTEM Compatible with: ROSSELLA, ELENA, ARIANNA E STEFANIA - MASTER, TOUCH and LED. Art.: XHC010 BAKERY.PURE - REPLACEMENT FILTER CARTRIDGE Compatible with: ROSSELLA, ELENA, ARIANNA E STEFANIA - MASTER, TOUCH and LED. Art.: XHC011 DET&RINSE™ SPRAY Extra strong oven detergent & rinsing agent for BAKERLUX SHOP.Pro™ ovens. Art.: DB1044 HAND CLEANING KIT Contains water drain, fittings, piping U-trap, connections and 1 DET&Rinse™ spray bottle (750 ml) Art.: XUC013 SHOWER CLEANING KIT Contains water drain, fittings, piping U-trap, connections, anti drip door trays, shower kit and 1 bottle of DET&Rinse™ SPRAY (750 ml) Art.: XHC027
INTERNET CONNECTION	 Illustrative photo refers to XEC012 kit	OPTIONALS FOR INTERNET CONNECTION FOR BAKERLUX SHOP.PRO™ OVENS Compatible with: BAKERLUX SHOP.Pro™ MASTER and TOUCH models. LAN kit Art.: XEC011 Wi-Fi kit Art.: XEC012

Features 600 x 400 & 460 x 330

• Standard ○ Optional — Not available	MASTER	TOUCH	LED	GO
COOKING METHODS				
Convection baking with adjustable temperature (30 °C-260 °C)	•	•	•	•
Convection baking with humidity and adjustable temperature (30 °C-260 °C)	•	•	•	—
Maximum preheating temperature 260 °C	•	•	•	•
AUTOMATIC AND ADVANCE PROGRAMMING				
Cooking steps	9	9	3	3
QUICK PROGRAMS:	—	—	12	12
PROGRAMS:	896	99	99	99
PROGRAMS: names and pictures can be assigned to saved programmes	•	•	—	—
PROGRAMS: recipes can be saved with a name	•	•	—	—
MULTI.Time: it manages more than 10 timers to control different products being cooked simultaneously	•	—	—	—
UNOX INTELLIGENT.PERFORMANCE TECHNOLOGIES - UIP				
ADAPTIVE.Cooking™ technology: bake a single tray or a full load with the same baking program and get the exact same results.	•	—	—	—
AUTO.Soft technology: controls the temperature to ensure total uniformity	•	—	—	—
SMART.Preheating technology: the oven preheats to the desired temperature, taking into account its recent use	•	—	—	—
AUTO.MATIC: automatic door opening, interrupting the baking process at just the right moment to guarantee excellent results.	•	•	—	—
UNOX INTENSIVE.COOKING TECHNOLOGIES - UIC				
AIR.Plus technology: 2 speeds of air flow in the chamber, can be adjusted by user	•	•	•	—
AIR.Plus technology: multiple fans running in reverse	•	•	•	•
STEAM.Plus technology: mixed convection - humidity baking (20-40-60-100%)	•	•	•	—
DRY.Plus technology: It extracts humidity from the baking chamber	•	•	•	•
EFFICIENT.Power: 300 seconds to go from 60 to 260 °C.	•	•	•	•
EFFICIENT.Power: ENERGY STAR certification	•	•	•	•
DATA DRIVEN COOKING TECHNOLOGIES - DDC				
Ethernet connection board to keep the oven connected to ddc.unox.com and UNOX App	○	○	—	—
DDC Stats: Oven usage and consumption reports.	•	—	—	—
BAKING STATIONS				
MAXI.LINK technology: It allows you to create units with two stacked ovens	•	•	•	—
THERMAL INSULATION AND SAFETY				
Protek.SAFE™ technology: maximum thermal efficiency and working safety	•	•	•	•
Protek.SAFE™ technology: the motor stops when the door is opened to limit energy loss	•	•	•	•
DOOR OPENING				
Manual vertically-opening door (up to down) (Only for CAMILLA and VITTORIA models)	—	•	•	•
Electromechanical and automatic horizontally-opening door (right-to-left; only for Matic versions)	•	•	—	—
Manual horizontally-opening door (right-to-left)	—	—	•	•
AUXILIARY FUNCTIONS				
Preheating temperatures up to 260 °C that can be set by the user for each programme	•	•	•	•
It shows the remaining time for the baking programme currently in use	•	•	•	•
'INFINITE' continuous operation	•	•	•	•
It shows the nominal and actual baking time, chamber temperature, humidity level and fan speeds	•	•	•	•
Temperature units shown in °C or °F	•	•	•	•
TECHNICAL DETAILS				
Tray supports in L-shaped sheet metal (Only for CAMILLA and VITTORIA models)	•	•	•	•
Tray supports in chrome-plated steel (Only for ELENA and ROSSELLA models)	•	•	•	•
Tray supports in chrome-plated steel with anti-tipping system (Only for STEFANIA and ARIANNA models)	•	•	•	•
Sealed control panel to avoid steam infiltrating the circuit board (IPX4)	•	•	•	•
Lightweight - Heavy Duty structure using innovative materials	•	•	•	•
Door open switch	•	•	—	—
Temperature limiter for safety	•	•	•	•
Easy-to-clean, openable internal glass panel (only for right-to-left door opening models)	•	•	•	•
Easy-to-clean internal glass panel (only for drop down opening models)	—	•	•	•



LONGLife4!

Optional guarantee on spare parts for 4 years/10,000 hours*

The most solid demonstration of the quality and reliability of the BAKERLUX SHOP.Pro™. You can extend your warranty* on spare parts for up to 4 years or 10,000 hours of use and on labour for up to 2 years or 10,000 hours of use. Activating the LONG. Life4 warranty is easy. Simply connect your new BAKERLUX SHOP.Pro™ MASTER or TOUCH oven to the Internet via an Ethernet cable (LAN) or via Wi-Fi using their respective accessories.

OPTIONAL FOR INTERNET CONNECTION FOR BAKERLUX SHOP.Pro™ MASTER AND TOUCH OVENS

Art.: XEC011	LAN kit
Art.: XEC012	Wi-Fi kit



INTERNATIONAL

UNOX S.p.A.

Via Majorana 22 / 35010 Cadoneghe (PD) Italy
Tel +39 049 8657511 / Fax +39 049 8657555
info@unox.com



INVENTIVE SIMPLIFICATION

EUROPE

ITALIA

UNOX S.p.A.
E-mail: info@unox.it
Tel.: +39 049 86 57 511

ČESKÁ REPUBLIKA

UNOX DISTRIBUTION s.r.o.
E-mail: info.cz@unox.com
Tel.: +420 241 940 000

РОССИЯ, ПРИБАЛТИКА И СТРАНЫ СНГ UNOX РОССИЯ

E-mail: info.ru@unox.com
Tel.: +7 (499) 702-00-14

ESPAÑA

UNOX PROFESIONAL ESPAÑA S.L.
E-mail: info.es@unox.com
Tel.: +34 900 82 89 43

SCANDINAVIAN COUNTRIES UNOX SCANDINAVIA AB

E-mail: info.se@unox.com
Tel.: +46 79 075 63 64

UNITED KINGDOM

UNOX UK Ltd.
E-mail: info@unoxuk.com
Tel.: +44 1252 851 522

PORTUGAL

UNOX PORTUGAL
E-mail: info.pt@unox.com
Tel.: +351 918 228 787

POLSKA

UNOX POLSKA Sp. z o.o.
E-mail: info.pl@unox.com
Tel.: +48 665 232 000

DEUTSCHLAND

UNOX DEUTSCHLAND GmbH
E-mail: info.de@unox.com
Tel.: +49 2951 98760

FRANCE, BELGIUM & LUXEMBOURG

UNOX FRANCE s.a.s.
E-mail: info@unox.fr
Tel.: +33 4 78 17 35 39

ÖSTERREICH

UNOX ÖSTERREICH GmbH
E-mail: auftrag@unox.com
Tel. +43 800 880 963

HRVATSKA

UNOX CROATIA
E-mail: narudzbe@unox.com
Tel.: +39 049 86 57 538

TÜRKİYE

UNOX TURKEY Profesyonel Mutfak
Ekipmanları Endüstri ve Ticaret Limited Şirketi
E-mail: info.tr@unox.com
Tel.: +90 530 176 62 03

IRELAND

UNOX IRELAND
E-mail: info.ie@unox.com
Tel. +353 (0) 87 32 23 218

БЪЛГАРИЯ

UNOX BULGARIA
E-mail: info.bg@unox.com
Tel.: +359 88 23 13 378

ASIA & AFRICA

MALAYSIA & SINGAPORE

UNOX (ASIA) SDN. BHD
E-mail: info.asia@unox.com
Tel.: +603-58797700

OTHER ASIAN COUNTRIES

UNOX (ASIA) SDN. BHD
E-mail: info.asia@unox.com
Tel.: +603-58797700

PHILIPPINES

UNOX PHILIPPINES
E-mail: info.asia@unox.com
Tel.: +63 9173108084

대한민국

UNOX KOREA CO. Ltd.
이메일: info.kr@unox.com
전화: +82 2 69410351

AMERICA & OCEANIA

U.S.A. & CANADA

UNOX Inc.
E-mail: info.usa@unox.com
Tel.: +1 800 489 8669

MEXICO

UNOX MEXICO, S. DE R.L. DE C.V.
E-mail: info.mx@unox.com
Tel.: +52 1555 4314 180

BRAZIL

UNOX BRAZIL
E-mail: info.br@unox.com
Tel.: +55 11 98717-8201

U.A.E.

UNOX MIDDLE EAST DMCC
E-mail: info.uae@unox.com
Tel.: +971 55 426 3167

SOUTH AFRICA

UNOX SOUTH AFRICA
E-mail: info.sa@unox.com
Tel.: +27 845 05 52 35

INDONESIA

UNOX INDONESIA
E-mail: info.asia@unox.com
Tel.: +62 81908852999

中华人民共和国

UNOX TRADING (SHANGHAI) CO. Ltd.
电子邮件: info.china@unox.com
电话: +86 21 56907696

COLOMBIA

UNOX COLOMBIA
E-mail: info.co@unox.com
Tel.: +57 350 65 88 204

ARGENTINA

UNOX ARGENTINA
E-mail: info.ra@unox.com
Tel.: +54 911 37 58 43 46

AUSTRALIA

UNOX AUSTRALIA PTY Ltd.
E-mail: info@unoxaustralia.com.au
Tel.: +61 3 9876 0803

NEW ZEALAND

UNOX NEW ZEALAND Ltd.
E-mail: info@unox.co.nz
Tel.: +64 (0) 800 76 0803

unox.com

Follow us on

